

Sun™ Crypto Accelerator 4000 Board



Reducing the cost and complexity of network security.

Key Highlights

- Integrated Gigabit Ethernet with a copper or fiber interface
- Accelerates IPsec and SSL cryptographic functions
- SSL session establishment rate: up to 4300 operations per second¹
- SSL bulk encryption rate: up to 800 Mbps
- Provides up to 2048-bit RSA encryption
- Delivers up to 10 times faster 3DES bulk data encryption²
- Provides tamper-proof, centralized key and certificate storage for Sun™ ONE Web software for increased security and simplified key management
- Designed to FIPS 140-2 Level 3 certification³

Supports:

- Solaris™ Operating Environment (IPsec VPN)
- Sun ONE Web Server software (SSL)
- Apache Web Server software (SSL)

¹ SSL performance may degrade when activating FIPS mode.

² Tests were done by encrypting 16 KB buffers using the Sun Crypto Accelerator 4000 board and software respectively on a Sun Fire 280R with one 900 MHz UltraSPARC® III Cu processor, achieving up to 800 Mbps throughput.


³ Applies to SSL protocol. Certification testing completion scheduled for August 2003.

Why Not Improve Your Network Security and Your Bottom Line?

While security is mandatory in today's business environment, it doesn't need to add undue complexity or be a drain on your system performance, resources, or budget. Designed to offer maximum value, the Sun™ Crypto Accelerator 4000 board lets you efficiently deliver cost-effective network security on Sun servers running Solaris™ Operating Environment, Sun™ ONE Web Server, or Apache Web server software. By combining Gigabit Ethernet functionality with specialized hardware that off-loads and accelerates IPsec and SSL cryptographic operations, the Sun Crypto Accelerator 4000 board allows you to significantly improve the security, performance, and availability of your applications. Ideal for companies using IPsec VPNs, the board provides the high-bandwidth connections and optimized performance required to efficiently protect your business-to-business and server-to-server communications. Applications using the SSL protocol can also gain increased transaction protection and performance from the board.

Capable of establishing SSL sessions at up to 4300 RSA operations per second, the Sun Crypto Accelerator 4000 board efficiently off-loads IPsec and SSL functions from host processors, helping to eliminate the dropped connections that can result from compute-intensive cryptographic calculations. By handling both authentication and encryption functions, the specialized board frees servers to complete primary tasks, enabling you to maximize resource use and reduce your cost of ownership for network security.

The PCI-based card also lets you better manage unexpected spikes in encrypted traffic and leverage gigabit Ethernet bandwidth to support increased traffic requirements, helping you provide a more consistent, satisfactory user experience.

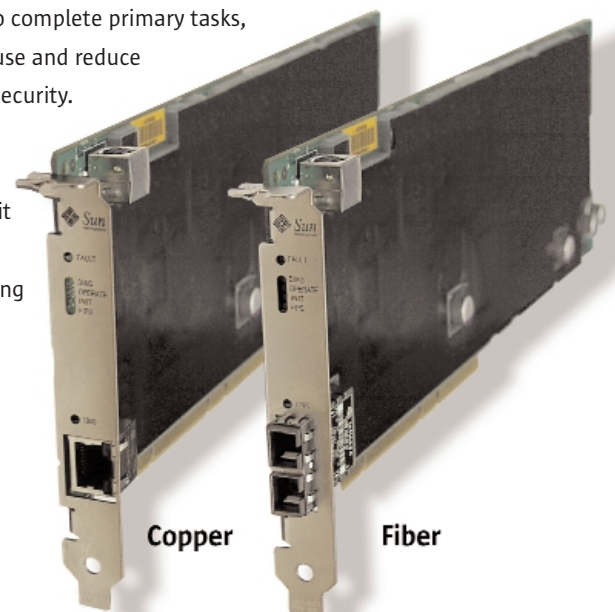

Sun Crypto Accelerator 4000 Board Specifications

Operating Environment

Solaris 9 or later for IPsec

Solaris 8 7/01 or later for SSL

Web Server Environment

Sun ONE Web Server 4.1 SP9 and 6.x

Apache Web Server 1.3.26

Protocols

SSL (Secure Sockets Layer)

IPsec (Internet Protocol security) VPN

Cryptographic Functions

Hash functions: SHA1 and MD5

Block cyphers: DES and 3DES

Modular exponentiation:

RSA/IKE public key with lengths of 512 bits to 2048 bits

RSA 1024-bit private key with CRT; up to 4300 ops/sec

DSA 1024-bit public key; up to 5400 ops/sec

3DES bulk encryption acceleration; up to 800 Mbps

True random number generation; up to 350 Kbps

Gigabit Ethernet Functions

1000 Mbps Ethernet with a fiber or copper interface

Complies with IEEE 802.3ab/802.3z Gigabit Ethernet Standard

Connections

Sun Crypto Accelerator 4000 Copper: RJ-45 UTP connector for Cat 5 cabling

Sun Crypto Accelerator 4000 Fiber: SC fiber connector for 50/62.5 micron fiber

PCI Adapter

33/66 MHz, 32/64 bit

PCI 2.2 Spec compliant

Full-length PCI card

Regulatory Standards Certification

Sun Spec 990-1151: Test limits and margins

EN55022: RF radiated and conducted emissions

FCC (>1 GHz): RF radiated emissions

EN55024:

EN61000-4-2 ESD

EN61000-4-3 RF immunity

EN61000-4-4 EFT/burst I/O lines, if applicable

EN61000-4-5 surge I/O lines, if applicable

EN61000-4-6 conducted immunity I/O lines, if applicable

Safety and ergonomic: IEC 825 and US FDA laser and LED safety certificates, if applicable

Country registrations: Canada ICES; Japan VCCI; Korea MIC; Taiwan BSMI

Environment

Fully compliant with Sun's EMI and safety requirements

Operating: 0° C to 60° C

Nonoperating: -40° C to 85° C

Humidity: 0% to 95% relative humidity, noncondensing

Power/power dissipation: Under 25 W maximum

Universal signaling: 3.3 V or 5 V; PCI signaling

Dimensions

Width: 107 mm (4.2 in.)

Depth: 314 mm (12.38 in.)

Systems Supported

Workstations: Sun Blade™ 100, 150, 1000, 2000

Volume servers: Sun Fire™ V120, V210, V240, 280R, V480, V880, Netra™ 20

Midframe servers: Sun Fire 4800, 6800

High-end servers: Sun Fire 12K, 15K

Sun Microsystems, Inc. 4150 Network Circle, Santa Clara, CA 95054 USA Phone 1-800-555-9SUN or 1-650-960-1300 Web www.sun.com



Sun Worldwide Sales Offices: Argentina +5411-4317-5600 Australia +61-2-9844-5000 Austria +43-1-69563-0 Belgium +32-2-704-8000 Brazil +55-11-5187-2100 Canada +905-477-6745 Chile +56-2-3724500 Colombia +571-629-2323, Commonwealth of Independent States +7-502-935-8411, Czech Republic +420-2-3300-9311, Denmark +45 4556 5000, Egypt +202-570-9442, Estonia +372-6-308-900, Finland +358-9-525-561, France +33-134-03-00-00, Germany +49-89-46008-0, Greece +30-1-618-8111, Hungary +36-1-489-8900, Iceland +354-563-3010, India-Bangalore +91-80-2298989/2295454; New Delhi +91-11-6106000; Mumbai +91-22-697-8111, Ireland +353-1-8055-666, Israel +972-9-9710500, Italy +39-02-641511, Japan +81-3-5717-5000, Kazakhstan +7-3272-466774, Korea +82-2193-5114, Latvia +371-750-3700, Lithuania +370-729-8468, Luxembourg +352-49 11 33 1, Malaysia +603-21161888, Mexico +52-5-258-6100, The Netherlands +00-31-33-45-15-000, New Zealand-Auckland +64-9-976-6800; Wellington +64-4-462-0780, Norway +47 23 36 96 00, People's Republic of China-Beijing +86-10-6803-5588; Chengdu +86-28-619-9333; Guangzhou +86-20-8755-5900; Shanghai +86-21-6466-1228; Hong Kong +852-2202-6688, Poland +48-22-8747800, Portugal +351-21-4134000, Russia +7-502-935-8411, Saudi Arabia +9661 273 4567, Singapore +65-6438-1888, Slovak Republic +421-2-4342-9485, South Africa +27 11 256-6300, Spain +34-91-596-9900, Sweden +46-8-631-10-00, Switzerland-German 41-1-908-90-00; French 41-22-999-0444, Taiwan +886-2-8732-9933, Thailand +662-344-6888, Turkey +90-212-335-22-00, United Arab Emirates +9714-3366333, United Kingdom +44-1-276-20444, United States +1-800-555-9SUN OR +1-650-960-1300, Venezuela +58-2-905-3800, Or Online at sun.com/store

SUN™ THE NETWORK IS THE COMPUTER © 2003 Sun Microsystems, Inc. All rights reserved. Sun, Sun Microsystems, the Sun logo, Solaris, Sun Blade, Sun Fire, Netra, and The Network Is The Computer are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the United States and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc. Part # DS005_02SCA4000_0403 Datasheet